



Publication Year	2022
Acceptance in OA	2022-03-14T14:51:29Z
Title	Assessing the role of clay and salts on the origin of MARSIS basal bright reflections
Authors	MATTEI, ELISABETTA, Pettinelli, Elena, Lauro, Sebastian Emanuel, Stillman, David E., COSCIOTTI, BARBARA, MARINANGELI, LUCIA, Tangari, Anna Chiara, Soldovieri, Francesco, OROSEI, ROBERTO, Caprarelli, Graziella
Publisher's version (DOI)	10.1016/j.epsl.2022.117370
Handle	http://hdl.handle.net/20.500.12386/31571
Journal	EARTH AND PLANETARY SCIENCE LETTERS
Volume	579

Assessing the role of clay and salts on the origin of MARSIS basal bright reflections

Elisabetta Mattei¹, Elena Pettinelli^{1*}, Sebastian Emanuel Lauro¹, David E. Stillman², Barbara Cosciotti¹, Lucia Marinangeli³, Anna Chiara Tangari³, Francesco Soldovieri⁴, Roberto Orosei⁵ and Graziella Caprarelli⁶

Corresponding author: elena.pettinelli@uniroma3.it

Affiliations:

¹ Dipartimento di Matematica e Fisica, Università degli studi Roma Tre, Rome, Italy

² Department of Space Studies, Southwest Research Institute, Boulder, USA

³ Dipartimento di Scienze Psicologiche, della Salute e del Territorio, Università degli studi “G. D’Annunzio” Chieti – Pescara, Chieti, Italy

⁴ Istituto per il Rilevamento Elettromagnetico dell’Ambiente, Consiglio Nazionale delle Ricerche, Naples, Italy

⁵ Istituto di Radioastronomia (IRA), Istituto Nazionale di Astrofisica (INAF), Bologna, Italy

⁶ Centre for Astrophysics, Institute for Advanced Engineering and Space Sciences, University of Southern Queensland, Toowoomba, Australia

Highlights

- Bright basal reflections have been detected by MARSIS at Ultimi Scopuli, Mars
- High permittivity contrast between the ice and the basal material is required
- Wet sediments or ponded water have been suggested as the cause of such reflections
- Hydrous minerals and salts are considered as possible alternative to basal water
- Only brines can generate such high dielectric contrast at low basal temperature

35 **Abstract**

36 Anomalous bright basal reflections detected by MARSIS at Ultimi Scopuli have been interpreted
37 to indicate the presence of water-saturated materials or ponded liquid water at the base of the South
38 Polar Layered Deposits (SPLD). Because conventional models assume basal temperatures ($\leq 200\text{K}$)
39 much lower than the melting point of water, this interpretation has been questioned and other
40 explanations for the source of the bright basal reflections have been proposed, involving clay,
41 hydrated salts, and saline ices. Combining previous published data, simulations, and new laboratory
42 measurements, we demonstrate that the dielectric properties of these materials do not generate
43 strong basal reflections at MARSIS frequencies and Martian temperatures. Plausible candidates
44 remain perchlorates and chlorides brines that exhibit a strong dielectric response at much lower
45 temperatures than other materials. This explanation might require that metastability could be
46 maintained for a long period of time on a geological scale.

47
48 **Keywords:** MARSIS, bright radar reflections, permittivity, clay, salts, brines

51 **1. Introduction**

52 In the last fifty years, terrestrial Radar Echo Sounding (RES) technique has played a fundamental
53 role in detecting subglacial liquid water and understanding the hydrological processes beneath
54 Antarctica and Greenland ice sheets (Siegert, 2018). Planetary radar sounders could now play a
55 similar role for Mars. Recently, MARSIS (Mars Advanced Radar for Subsurface and Ionosphere
56 Sounding), onboard Mars Express spacecraft, detected bright reflections from the base of the
57 Martian South Polar Layered Deposits (SPLD) at Ultimi Scopuli (Orosei et al., 2018; Lauro et al.,
58 2021). Such reflections have characteristics comparable to those acquired by terrestrial RES above
59 subglacial water ponded areas (Lauro et al., 2021), and were therefore interpreted as caused by
60 (partially) water-saturated materials and/or layers of liquid water. Given the low temperatures
61 commonly inferred at the base of the SPLD (of the order of 200 K or lower) (Wieczorek, 2008;
62 Plesa et al., 2018; Sori and Bramson, 2019), liquid water can only exist as aqueous solutions of
63 salts known to strongly depress the freezing point of water, such as perchlorates, chlorates and
64 chlorides [e.g., Chevrier et al. (2009); Toner, and Catling (2018); Primm et al. (2020); Stillman et
65 al. (2021)]. Briny waters are common in terrestrial glacial environments and are considered to be

66 some of the brightest englacial or subglacial reflectors detectable with radar sounders [e.g., Nobes
67 et al. (2005); Grima et al. (2016); Rutishauser et al. (2018)].

68 Other subglacial water-saturated sediments, especially clay, could however also produce a strong
69 radar response [e.g., Tulaczyk and Foley (2020)]. On Mars, clay and other hydrous mineral bearing
70 deposits have been identified in many outcrops both remotely by OMEGA (Observatoire pour la
71 Minéralogie, l'Eau, les Glaces, et l'Activité) (Bibring et al., 2006) onboard Mars Express and
72 CRISM (Compact Reconnaissance Imaging Spectrometer for Mars) onboard Mars Reconnaissance
73 Orbiter (Murchie et al., 2007), and in situ by the NASA Spirit and Curiosity rovers at the Gusev
74 and Gale craters landing sites [e.g., Clark et al. (2007); Bristow et al. (2018); Rampe et al. (2020a)].
75 Though no clear evidence of clay and salt outcrops in the terrains surrounding the SPLD has been
76 reported so far, their presence in the sediments at the base of the ice cannot be positively ruled out.
77 To assess the possibility that clay-rich sediments could produce basal reflections as strong as those
78 detected by MARSIS [e.g., Bierson et al. (2021); Smith et al. (2021)], we performed dielectric
79 laboratory measurements on Martian clay analogs. Here we compare our results to previously
80 published work on the dielectric properties of clay and salts at Martian temperatures, and to data
81 obtained from MARSIS observations at Ultimi Scopuli. We also discuss the role of specific briny
82 materials in the generation of bright basal reflections.

83

84 **2. Salts and clays on Mars**

85 Hydrous minerals and salts are largely present on Mars: they have been found in samples of Martian
86 meteorites (Gooding and Muenow, 1986; Treiman et al., 1993; McSween, 1994; Leshin and
87 Vicenzi, 2006; Muttik et al., 2014; Kounaves et al., 2014), and detected through orbital and lander
88 observations (Murchie et al., 2009; Ehlmann and Edwards, 2014). The formation of hydrous
89 minerals has been explained by a variety of processes, including late volcanic/hydrothermal
90 activity, low-grade metamorphism, deposition by migrating groundwaters, surface deposition in
91 fluvio-lacustrine or playa environments, adsorption of atmospheric water. Significant amounts of
92 hydrous minerals have not been detected at high latitudes, where they are probably masked by a
93 thin latitude dependent sedimentary layer (Mustard et al., 2001), and by polar processes. About
94 70% of phyllosilicates detections on Mars are of Fe/Mg smectites (nontronite, saponite) and
95 chlorite, followed in abundance by Al-smectites (montmorillonite, beidellite) (Ehlmann et al.,
96 2011). Quantitative analysis based on Curiosity rover measurements indicate an amount of clay
97 minerals ranging between 3 and 28% in fluvio-lacustrine sediments of Gale Crater mainly
98 containing smectite (Bristow et al., 2018; Rampe et al., 2020a). VNIR spectral analysis by orbiter

99 suggest abundances of 20–65 % clay (Fe-Mg clays) in Mawrth Vallis, representing the highest
100 values measured on Mars (Poulet et al., 2008). Thermal infrared spectra (TIR), indicate a clay
101 abundance of about 15 % in the southern highlands, while the amounts of clays do not exceed 30%
102 in Nili Fossae, Tyrrhena Terra, and Terra Sirenum (Poulet et al., 2008; Ehlmann et al., 2013). Clays
103 and salts may host significant amount of water. Recent estimates of the water content in Gale crater
104 sedimentary sequence show an interquartile range of 2.3–3.1 wt.% H₂O likely associated to
105 adsorbed water, molecular water of hydrated minerals, salts and amorphous phases (Thomas et al.,
106 2020).

107 Based on the stratigraphic distribution of clay and other minerals association, clay deposits on Mars
108 can be associated to three geological environments (Ehlmann et al., 2011; Ehlmann et al., 2013)
109 (Fig.1):

110 i) *crustal clays*, which include Mg-rich smectite (saponite) and chlorite minerals originated from
111 hydrothermal alteration, metamorphism and burial diagenesis (as demonstrated by laboratory
112 experiment (Gaudin et al., 2018; Bishop et al., 2018; Tangari et al., 2020);

113 ii) *stratigraphic clays*, consisting of Fe/Mg smectite overlain by Al- bearing phyllosilicates (as
114 kaolinite, montmorillonite and beidellite), late Noachian to Hesperian in age, often associated with
115 sulphates.

116 iii) *sedimentary clays*, characterized by Fe/Mg smectite often in association with salts and
117 carbonates, found in fluvial and paleolacustrine basins, such as Jezero and Gale Crater (Rampe et
118 al., 2020a; Ehlmann et al., 2009).

119 Owing to the global surface distribution of hydrous minerals and salts, and their susceptibility to
120 fragmentation and pulverization facilitating their spreading across the planet as part of the Martian
121 dust (Ehlmann and Edwards, 2014), grains of salts and hydrous minerals are likely to be present as
122 impurities in the water ice forming the polar caps, and as enriched components of the top layer of
123 regolith at the base of the polar layered deposits.

124

Clays type
 crustal
 stratigraphic
 sedimentary

MAIN MINERALOGY based on Ehlmann et al., 2011-2013	Fe/Mg smectite - chlorite - Al- clays (kaolinite, montmorillonite)- illite	Fe/Mg smectite - chlorite - Al-clays (kaolinite, montmorillonite, other unspecified) - silica - carbonates	Fe/Mg smectite - sulfate - Al-clays (other unspecified)
MARS sites	Argyre, Terra Sirenum, Nili Fossae	Valles Marineris, Arabia Terra	Jezero, Gale, Holden
EARTH analogues	Ch1, Ch2	Sm2, Sm3, Sm4	Sm1

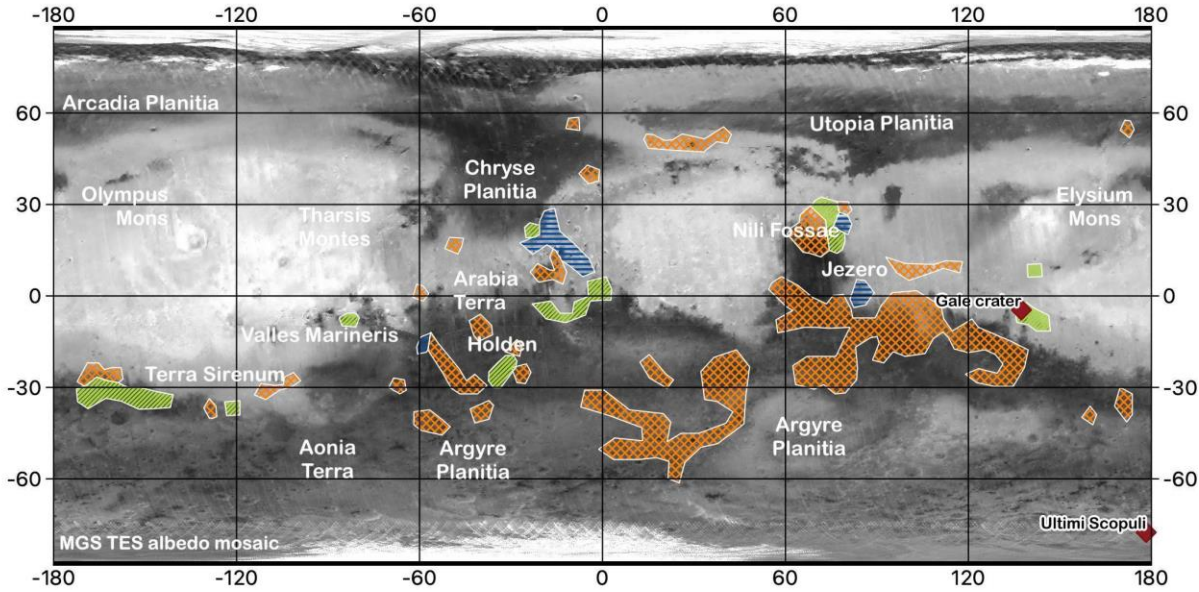


Fig.1. Distribution of clays on Mars. Crustal clays mostly contain Fe-Mg smectite and chlorite as evidence of bedrock alteration. Stratigraphic clays show association of Fe-Mg-Al-rich smectites with carbonates as result of deposition during the wettest period of Mars. Sedimentary clay is often associated with sulfates and chlorides. Potential correlation with used terrestrial analog samples is based on similarities with clay types (ref. to Table S1). Extent and type of clays mapped are from data in Ehlmann et al. (2011) and Ehlmann et al. (2013).

3. An overview on clay and salts dielectric properties

Clay sediments are composite materials: on Earth they are usually made of mineral grains, free water, air, clay aggregates (or clay platelets) and organic matter (Fig.2). Each component of the sediment has a specific dielectric response to an oscillating electric field (e.g., a radar wave) which is described by the complex (relative) dielectric permittivity:


$$\varepsilon = \varepsilon' + i\varepsilon'' \quad (1)$$

The real part of the dielectric permittivity (ε') accounts for the polarizability of the material (energy storage) and the imaginary part (ε'') for the energy loss due to heat caused by the polarization process (ε''_p) and free charge carrier migration (conduction), as follows:

$$\varepsilon'' = \varepsilon''_p + \frac{\sigma_{DC}}{2\pi f \varepsilon_0} \quad (2)$$

145

146 where $\varepsilon_0 = 8.85 \cdot 10^{-12} F/m$ is the dielectric permittivity of a vacuum, σ_{dc} is direct-current
147 conductivity and f is the frequency. The quantities ε' and ε'' depend on the frequency of the
148 applied electric field, the temperature of the material (T), water content and salinity (Olhoeft, 1981).
149 Apart from air (or free space) where $\varepsilon' = 1$, the only exception is given by the mineral grains
150 (including dry clay grains) for which ε' only depends on density ρ and ε'' is usually negligible
151 (Olhoeft, 1981; Liu and Mitchell, 2009).

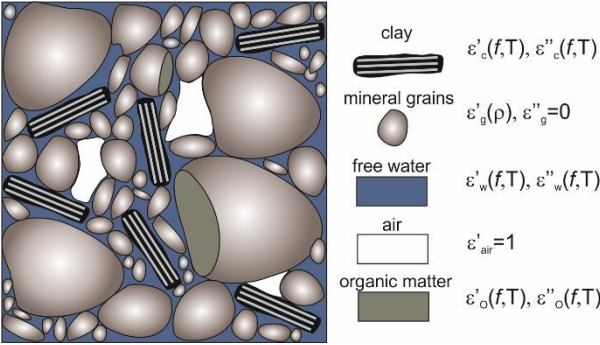

152

153 **Fig. 2.** Sketch of terrestrial unsaturated clay sediment dielectric properties. The overall complex dielectric permittivity
154 of a sediment is controlled by the volume fraction of the components and their specific dielectric response. Clay
155 particles are described here by a single value of the real and imaginary parts; however, such values are a combination
156 of various dielectric responses due to different forms of water inside the clay aggregates. Organic matter, typically
157 present in surface sediments on Earth, is absent or rare on Mars.

158

159 At a given temperature and for a relative volumetric fraction of each component, the clay sediment
160 dielectric spectra ($\varepsilon'(f)$ and $\varepsilon''(f)$) are a complex combination of the different dielectric
161 responses (Olhoeft, 1977; Lorek and Wagner, 2013). At terrestrial temperatures, the overall (bulk)
162 complex permittivity is generally dominated by free (salty) water (Fig. 2) as its real and imaginary
163 parts can be one-three orders of magnitude larger than those of the other components [e.g., Chelidze
164 et al. (1999), Ishida (2002)]. The dielectric effect of free water is removed if the clay sediment is
165 oven-dried or desiccated [e.g., Kuligiewicz and Derkowski (2017)]. However, such procedure does
166 not eliminate bound water, which may still have a high complex permittivity depending on
167 temperature and frequency (Liu and Mitchell, 2009) and thus could become dielectrically dominant,
168 especially for clays, such as smectite and vermiculite, that accommodate a large amount of
169 interlayer water (Lorek and Wagner, 2013; Johnston, 2010). On the other hand, if a wet clay
170 sediment is cooled below 273 K, free water confined in the pore space of the sediment and in the
171 clay aggregates starts to freeze, and its contribution to the overall complex permittivity becomes

progressively comparable to that of the mineral grains at MARSIS frequencies. Depending on frequency, the dielectric behavior of bound water could become predominant, controlling the overall complex dielectric permittivity of the material [e.g., Olhoeft (1977)].

As hydrated salts are often associated with clay minerals in the sediments, we first discuss their contribution to the overall dielectric behavior of clay-rich sediments. Dielectric properties of hydrated salts have been studied for almost a century [e.g., Burton and Turnbull (1937), Cheng (1940), Kamiyoshi and Miyamoto (1950), Young and Frederikse (1973)]. It is well known that low loss characterizes pure salt at frequencies between 1 MHz and 1 GHz, which results in large radar signal penetration (Stewart and Unterberger, 1976). Dielectric measurements on different types of hydrated salts in the MHz range at low and high temperatures (ref. to Table 1) indicate that the real part of permittivity is mainly constant with temperature, and ranges between 4 and 8 (Parkhomenko, 1967), depending on the hydrated state of the crystal (Pettinelli et al., 2016). The imaginary part is usually very low [e.g., Stewart and Unterberger, Parkhomenko (1967)]: the hydrated magnesian sulfate meridianiite for example, has an almost constant value of the real part of permittivity in the temperature interval 200-300 K, and a negligible imaginary part (Pettinelli et al., 2016). The real part of jarosite is very low, and it is frequency and temperature independent within the range of temperature 180-296 K and at frequencies between 1 MHz and 1 GHz (Stillman and Olhoeft, 2008). Additionally, the loss term is below the measurement limit of the instrument, which indicates its direct-current conductivity is less than 6.67×10^{-5} S/m.

Table 1 Real and imaginary parts of permittivity of some hydrous minerals of interest for Mars.

Hydrated salts						
	ϵ'	ϵ''	Frequency	Temperature	Reference	Sample
Meridianiite	4.7	~0	1MHz	200K	Pettinelli et al. (2016)	Solid
Jarosite	3.07	~0	1MHz	180-296K	Stillman and Olhoeft, 2008	Granular
Gypsum	6.4	0.01	1 MHz	298K	Olhoeft (1979)	Solid
Anhydrite	6.9	0.06	1 MHz	298K	Olhoeft (1979)	Solid
Dry clay						
Chlorite	7.4	1.5	1 MHz	298K	Olhoeft (1979)	Solid
Kaolinite	4.6	~0	30MHz	298K	Saarenketo (1998)	Solid
Nontronite	3.7	0.08	10MHz	220K	Cunje et al. (2018)	Granular
Ca-montmorillonite (STx-1b)	3.6	0.08	10MHz	220K	Cunje et al. (2018)	Granular
Ca-bentonite	3.5	0.07	1MHz	298K	Saltas et al. (2008)	Granular

The dielectric response of clay minerals is particularly complex [e.g., Liu and Mitchell (2009), Sposito and Prost (1982), Cadène et al. (2006)] due to their retention properties. As smectite is the most common type of clay mineral detected on Mars, we focus here mainly on the properties of this group, though all clays share a common dielectric behavior. Smectites have an expanding lattice, with their layers easily separated by water, and are characterized by a large cation exchange

capacity. The number of water molecules that can be accommodated between layers depends on the interlayer cation species and the relative humidity (Johnston, 2010). In general, clay aggregates contain three forms of water: interlayer water, electrostatic double layer water, and free porewater (Wersin et al., 2004). The interlayer water is bound to the exchangeable cations (counterions) and/or to the negatively charged clay particle surfaces, whereas the electrostatic double layer forms a transition zone between the mineral grain surface and the free water confined in the interparticle or interaggregate space. These forms of water have different dielectric response (i.e., different ϵ' and ϵ'') depending on the frequency of the applied electric field and the temperature of the material, which combine in a complicated manner. The dielectric properties of smectites have been extensively studied by several authors at different temperature, frequencies, and water content conditions [e.g., Liu and Mitchell (2009), Sposito and Prost (1982), Cadène et al. (2006), Kaviratna et al. (1996), Kaden et al. (2013)]. In the MHz range, the real part of permittivity of solid clay grains varies between 4 and 8, and remains nearly constant with temperature [e.g., Olhoeft (1979), Saarenketo (1998)] (see Table 1). At low temperature (220 K) dry smectites (montmorillonite and nontronite) exhibit very low values of complex permittivity that do not appreciably change with frequency (Cunje et al., 2018; Kułacz et al., 2021). However, at 298 K and 1 MHz, wet smectite sediments have fairly different dielectric behavior, with real and imaginary parts of permittivity reaching values of the order of 10^2 and 10^3 , respectively (Kaden et al., 2013; Kułacz and Orzechowski, 2019). Conversely, extensive literature data indicate that at low temperature (well below 273 K) the complex dielectric permittivity of wet clay sediments (montmorillonite, bentonite or nontronite enriched) drops significantly, sometimes reaching values close to those of dry clays [e.g., Lorek and Wagner (2013), Cunje et al. (2018), Kułacz and Orzechowski (2019), Moore and Maeno (1993), Bittelli et al. (2004), Stillman et al. (2010)].

4. Radar reflection and apparent permittivity

MARSIS retrieved permittivity values are estimated from the amplitude of the reflected signal. The reflection coefficient Γ_{12} of a normally impinging plane wave at an interface between two adjacent materials depends on the complex dielectric permittivity of such materials (i.e., their dielectric contrast) as follows:

$$\Gamma_{12} = \frac{\sqrt{\varepsilon'_1 + i\varepsilon''_1 + i\frac{\sigma_{1DC}}{2\pi f \varepsilon_0}} - \sqrt{\varepsilon'_2 + i\varepsilon''_2 + i\frac{\sigma_{2DC}}{2\pi f \varepsilon_0}}}{\sqrt{\varepsilon'_1 + i\varepsilon''_1 + i\frac{\sigma_{1DC}}{2\pi f \varepsilon_0}} + \sqrt{\varepsilon'_2 + i\varepsilon''_2 + i\frac{\sigma_{2DC}}{2\pi f \varepsilon_0}}} \quad (3)$$

Equation (3) shows that Γ_{12} is, in general, a complex quantity, which would require information on the modulus and phase of the reflected signal to be solved. Conversely, MARSIS data lack the information on the signal polarity and only allow to estimate $|\Gamma_{12}|$, which is a real quantity. Therefore, MARSIS does not allow to separately compute real and imaginary parts of the complex permittivity. Nevertheless, if some assumption on the permittivity of the first layer can be made, for example that the loss term is negligible ($\varepsilon_1 = \varepsilon'_1$), it is still possible to estimate the dielectric properties of the second layer introducing the concept of the apparent permittivity ε_a :

$$|\Gamma_{12}| = \frac{\sqrt{\varepsilon_a} - \sqrt{\varepsilon_1}}{\sqrt{\varepsilon_a} + \sqrt{\varepsilon_1}} \quad (4)$$

under the assumption that the permittivity of the second layer is larger than that of the first layer. Note that Eqn.4 can be slightly modified if the permittivity of the second layer is lower. The quantity ε_a is analytically obtained as (see Appendix A):

$$\varepsilon_a = \varepsilon_1 \left[\frac{1 + |\Gamma_{12}|}{1 - |\Gamma_{12}|} \right]^2 = \varepsilon_1 \frac{\varepsilon_1 + |\varepsilon_2| + \sqrt{\varepsilon_1^2 + |\varepsilon_2|^2 - 2\varepsilon_1\varepsilon'_2}}{\varepsilon_1 + |\varepsilon_2| - \sqrt{\varepsilon_1^2 + |\varepsilon_2|^2 - 2\varepsilon_1\varepsilon'_2}} \quad (5)$$

It is important to point out that the apparent permittivity is a real quantity that accounts for both polarization and conductive processes and fully describes the dielectric properties of a material. Such quantity should not be confused with the real part of permittivity ε'_2 , as it accounts for both real and imaginary parts of the basal permittivity ε_2 and represents the value that MARSIS would detect if such material lay below the SPLD. We use equation (5) to compute the apparent permittivity using real and imaginary parts of published data and laboratory measurements on clay sediments and salt solutions, assuming for the SPLD a permittivity value $\varepsilon'_1 = 3.5$. Values computed with Equation (5) were compared to those retrieved from MARSIS data inversion in the bright reflection area at Ultimi Scopuli (Orosei et al., 2018; Lauro et al., 2021). Specifically, we

will use the median value ($\varepsilon_a = 33$) as the threshold against which to compare and discuss the results in this work. Such median refers to the statistical distribution of the apparent permittivities retrieved by MARSIS at 4 MHz at the base of the SPLD at Ultimi Scopuli (Orosei et al., 2018). Such distribution indicates that there is a probability of 75% to obtain an apparent permittivity value $\varepsilon_a \geq 16$.

5. Analysis of previous studies of dielectric properties of clays at Martian temperatures

We selected published data that allow the estimation of the apparent permittivity at 1 MHz (the closest to MARSIS frequencies common to all available data) for a set of smectites samples having different clay percentage, water content and salt solution concentration (Table 2).

Table 2. Properties and measurement conditions of clay samples used to compute the apparent permittivity at 1MHz from reference data.

Clay type	Clay content	Water content	Salt solution	Temperature range	Frequency range	Reference
Smectite (Ca-Montmorillonite)	9.67 vol % of STx-1*	0.22-1.34 wt%	1 M CaCl ₂	183K - 298K	1 mHz - 1 MHz	Stillman and Grimm (2011a)
Ca-Bentonite	65-70% wt%	9.27 wt%	-	203K – 293K	10Hz - 1.1 MHz	Lorek and Wagner (2013)
Natural nontronite	(~95 wt%)	21wt%	-	173K – 373K	25 Hz–1 MHz	Kuławcz and Orzechowski (2019)
Ca-Montmorillonite(1)	(20 v% SAz**)	80 v%	0.1 M CaCl ₂	180-298 K	1 mHz - 1 MHz	Stillman et al. (2010)
Ca-Montmorillonite(2)	(20 v% SAz**)	80 v%	0.001 M CaCl ₂	180-298 K	1 mHz - 1 MHz	Stillman et al. (2010)
Ca-Montmorillonite(3)	(46 v% SAz**)	10 v%/44% air	deionized water	180-298 K	1 mHz - 1 MHz	Stillman et al. (2010)

*(≥95% montmorillonite)
 **(>95% montmorillonite)

Among those, we selected two temperatures: 203K, the lowest value common to all measurements reported in Table 2 and 230K a temperature slightly higher than the mean surface temperature on Mars (~220K in Stillman and Grimm (2011a)). The apparent permittivity of the dataset computed at 1 MHz highlights the large variability (from 2.6 to 31.8) of the clay dielectric response (Fig. 3). Smectite and Ca-bentonite samples exhibit the lowest values (2.6-4.7) (Table 2) probably because of low water content, that do not appreciably change with temperature. The apparent permittivity of the Ca-montmorillonite and nontronite samples at 203 K does not exceed 13; however, at 230 K the apparent permittivity of the Ca-montmorillonite increases up to 20.1 for sample 1 and 16.0 for sample 2, respectively. Such increase is probably due to the liquid brines in the samples, as they were prepared by mixing the clay with a large amount of CaCl₂ solutions (Table 2), which has an eutectic temperature < 230 K (Grimm et al., 2008). The highest value is reached by the almost pure sample (95%) of natural nontronite with 21% of water content (Kuławcz and Orzechowski, 2019). These data suggest that for a temperature at the base of the SPLD > 230 K, some of the analyzed

clay samples could potentially produce relatively strong reflections. However, according to both theoretical and experimental evidence, the apparent permittivity of clay sediments should decrease at higher frequencies [e.g., Lorek and Wagner (2014), Kułacz and Orzechowski (2019), Stillman and Grimm (2011b), Kao (2004)]. Therefore, values at 1 MHz should be considered an overestimation relative to those measured at 4 MHz and must therefore be corrected before being compared with MARSIS data.

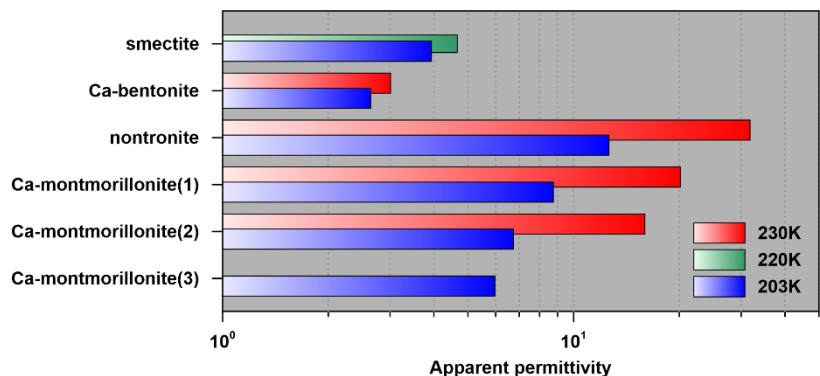
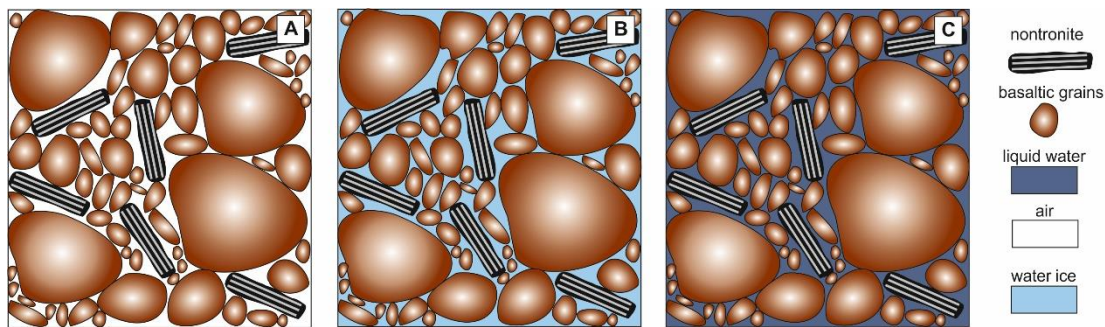


Fig. 3 Apparent permittivity at 1 MHz from literature data. Values of the apparent permittivity computed at 203 K and 230 K (220 K is from Stillman and Grimm (2011a), ref. to Table 2) from real and imaginary parts measured at 1 MHz on various smectite samples. The samples have different water content, clay content and salt solutions (Table 2).

Because the nontronite sample exhibits the highest apparent permittivity and is a common mineral in the Martian clay sediments, we used Kułacz and Orzechowski's (2019) experimental dataset to compute its apparent permittivity at 4 MHz, by shifting low temperature data to higher frequencies (according to the method proposed by Stillman and Grimm (2011a)). After correction, we found that the apparent permittivity at 203 K did not appreciably change from that at 1 MHz (~13), whereas at 230 K the value at 4 MHz decreases to 25.1. Moreover, as the nontronite sample is almost pure and the clay content detected in Martian terrains is highly variable (ranging between 3 and 65 wt%) we used the Complex Refractive Index Model (CRIM) (Sihvola, 1999) to evaluate the effect of the nontronite content (expressed in volume fraction) on the overall apparent permittivity of a clay sediment (Fig. 4). We assumed the composition of the sediments to be: i) basaltic grains, air and nontronite (desiccated Martian model) (Fig. 4A); ii) basaltic grains, water ice and nontronite (water ice saturated Martian model) (Fig. 4B); and iii) basaltic grains, liquid water and nontronite (terrestrial analog) (Fig. 4C). Mixing models were computed at 203 K, 230 K and 287 K for a volume fraction of nontronite ranging from 0 to 1. Permittivity values for the basalt grains and water ice are those published by Mattei et al. (2014), liquid water values are from Kaatze (1989), and those for natural nontronite (21 wt% H₂O) are by Kułacz and Orzechowski (2019). As expected,

319 the apparent permittivity values computed at 230 K are higher than those at 203 K and the values
 320 computed for the model with water ice in the pores are slightly larger than those with air-filled
 321 pores (Fig. 4D). The nontronite content produces a clear increase in the overall apparent
 322 permittivity: for example, 50% of nontronite content increases the apparent permittivity from 5.2
 323 (0%) to 13.1 in the simulation with ice. Even so, both plots at 203 K and 230 K are below MARSIS
 324 threshold value ($\epsilon_a = 33$), converging toward the values of (almost) pure nontronite at 4 MHz (25.1
 325 at 230 K and 12.6 at 203 K). Conversely, in the terrestrial water-saturated clay sediment simulation
 326 (287 K) MARSIS retrieved value is reached with 14% of nontronite content, whereas for dry
 327 sediment, we need at least 35% of nontronite volume fraction. The pink shaded area in Fig.4D
 328 delimits the region where the apparent permittivity values are above 16 (75% of the population of
 329 MARSIS retrieved basal permittivity). It is interesting to note that only samples at 230K containing
 330 at least 70% of nontronite fall inside this area.

331



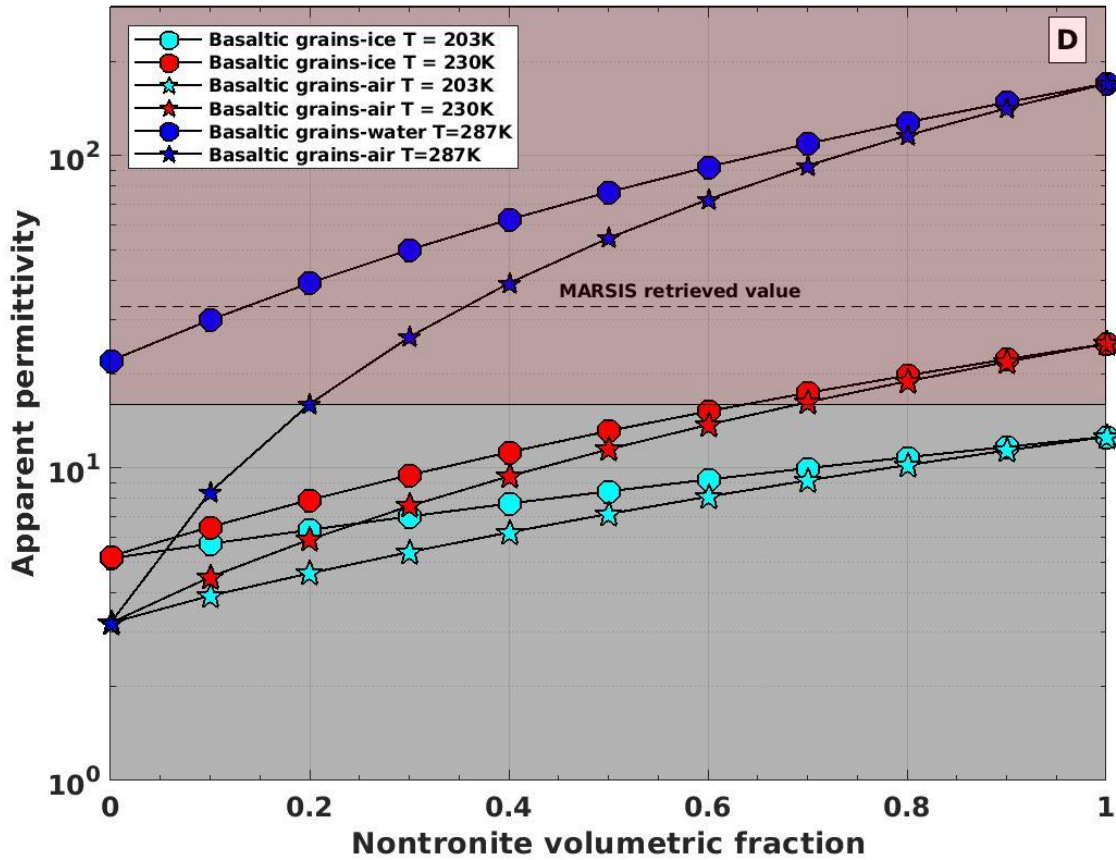


Fig. 4 Effect of nontronite content on the apparent permittivity from CRIM simulations at 4 MHz. A) desiccated Martian model; B) water ice saturated Martian model; C) terrestrial analogue. D) Different colors and shapes indicate different temperatures and mixtures: dots represent ice or water saturated mixtures; stars are dry samples (with air-filled pores). The ratio between the volume fraction of the basaltic grains and the material in the pore is held constant (1.5), with the nontronite volume fraction progressively increasing. The black dashed line indicates the MARSIS threshold value $\epsilon_a = 33$; pink area highlights the apparent permittivity interval for which the probability that the permittivity assumes values $\epsilon_a \geq 16$ is 75%.

6. Laboratory dielectric measurements

6.1 Martian clay sediments analogs


We complemented literature data with new experimental results. We performed a set of laboratory measurements, selecting six clay samples collected in Italy in different geological settings: recent Holocene (< 12,000 years) fluvial deposits, Pliocene-Early Pleistocene (< 5 million years) marine mudstone, and metamorphic deposits dated from Jurassic to Oligocene (< 200 million years). The samples were mostly selected based on clay mineralogy (Table S1) which makes them good analogs for Martian clays (Fig. 1). The clay mineralogy and percentage of clay in the sediments were

determined by X-ray diffraction (XRD) (ref. to Fig.S1 and Appendix B) enabling us to directly compare our data with the analysis performed by the XRD instrument (CHEMIN) in Gale crater (Rampe et al. 2020a). We also considered the overall distribution of clays on Mars based on spectral investigations from orbiter to have a more global context and variability of Martian clays (Fig.1). Identified clay minerals in our samples are smectite, illite, kaolinite, and chlorite (only present in two samples) with variable quantities as also observed in Gale crater (ref. to Table S1; Fig. S1). The samples were sieved at 75µm and oven-dried at 105°C until their weight remained constant, and then rehydrated with distilled water until they returned to initial water content (13-31 wt%). For one clay sample we also collected a series of measurements for different water contents to evaluate the dielectric properties of clays at dry or low water content. Measurements were performed while the samples slowly warmed up from an initial temperature of 200 K, to ensure thermal equilibrium inside the sample during each frequency sweep. Real and imaginary parts as a function of frequency and temperature were measured using a coaxial transmission line and a Vector Network Analyzer (Mattei et al., 2013), in the frequency range 1 MHz-1 GHz and over the temperature interval 200 K – 298 K (Appendix C). Data are reported as apparent permittivity vs. temperature at 4 MHz (Fig. 5) to allow a direct comparison with the basal apparent permittivity retrieved by MARSIS (Orosei et al., 2018).

All clay samples show a similar trend: at 200 K the apparent permittivity ranges between 4.0 (Ch1) and 6.4 (Sm2) and slightly increases (curves almost parallel) up to 224 K, at which point the values start to diverge. At about 230 K, values of apparent permittivity range between 6 (Ch1) and 10 (Sm2). At 252 K, the sample Sm2 reaches MARSIS threshold value. The same threshold is reached by sample Sm3 at 258 K, samples Sm1 and Sm4 at 262 K and samples Ch1 and Ch2 at about 268 K. Above 265 K, ice melting produces a steep increase in the apparent permittivity, whereas above 273 K the trend changes to a gentler slope as ice is totally molten. At a temperature of 290 K the apparent permittivity reaches values ranging between 10^2 - 10^3 , with Ch1 (13% water content, chlorite sample) being the lowest and Sm2 (21% water content, smectite sample) the highest. Moreover, the measurements collected on sample Sm4 at different water contents (Fig. S2) show that for low values of saturation (3.5% and 5.6% water content) the apparent permittivity at 273 K is around 10, reaching the MARSIS threshold value at 276 K with 14% of water content. No clear correlation between apparent permittivity and water content, clay content or clay mineralogy is recognizable in the data set (Fig.1 and Table S1), confirming the complexity of clay sediments dielectric behavior reported in the literature [e.g., Liu and Mitchell (2009), Lorek and Wagner (2013), Ishida (2002), Cadène et al. (2006)]. Moreover, data plotted as a function of frequency (Fig. S3) clearly show that both real and imaginary parts decrease when frequency increases, confirming

384 that in clay sediments caution should be taken when using values at 1 MHz to interpret radar data
 385 collected at 4 MHz.

386

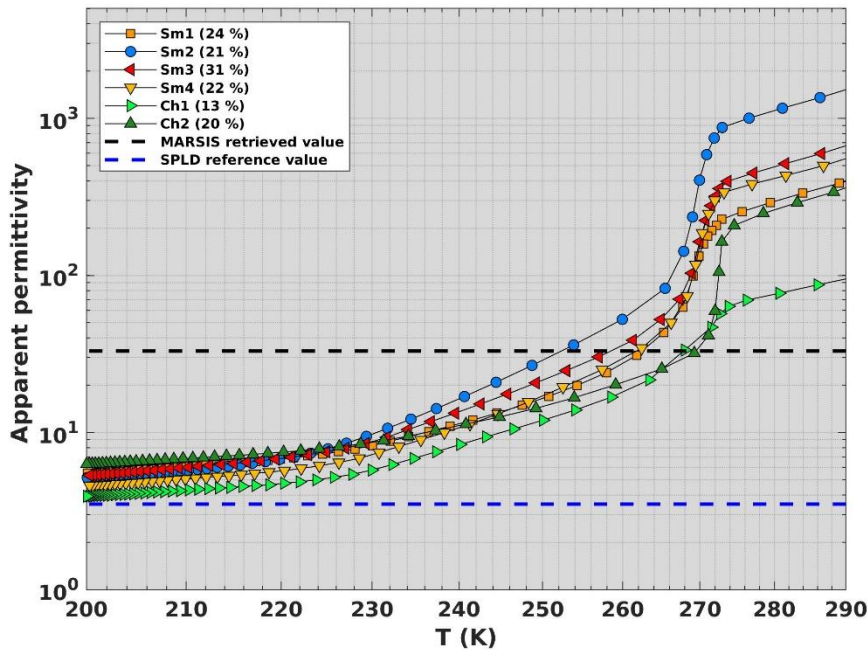

387


388 **Fig.5** Apparent permittivity at 4 MHz from experimental data. Apparent permittivity computed from real and imaginary
 389 parts measured at 4 MHz as a function of temperature on four smectite-rich (Sm) and two chlorite-rich (Ch) sediments
 390 having different water content (% in the legend). Black dashed line indicates the threshold $\epsilon_a = 33$ retrieved by
 391 MARSIS, and blue dashed line the SPLD ice permittivity value ($\epsilon_1' = 3.5$) used to compute the apparent permittivity.
 392 For clarity uncertainties are not shown in the diagram: they represent few percent of the measured values.

393

394 **6.2 $\text{Mg}(\text{ClO}_4)_2$ and CaCl_2 brines at Martian subglacial conditions**

395 Previous works (Orosei et al., 2018; Lauro et al., 2021) suggested brines as the most plausible cause
 396 of MARSIS strong reflections as salty solutions can have very high complex permittivity (Addison,
 397 1975). We quantify here the dielectric response of $\text{Mg}(\text{ClO}_4)_2$ and CaCl_2 brines at Martian
 398 subglacial conditions by computing the apparent permittivity as a function of temperature at 4 MHz
 399 from published (Stillman et al., 2010; Stillman and Grimm, 2011a; Grimm et al., 2008; Stillman
 400 and Grimm, 2011b) and unpublished (measurement methodology is the same as Stillman et al.
 401 (2010)) data. We considered pure solutions for high salt concentrations ($\text{Mg}(\text{ClO}_4)_2$ 44%wt, CaCl_2
 402 33%wt, and CaCl_2 21%wt) and both pure solutions and saturated sand for low salt concentrations
 403 (100 mM for both $\text{Mg}(\text{ClO}_4)_2$ and CaCl_2). Measurements were taken between 180 K and 270 K,
 404 noting however that, once the ice starts melting, the imaginary part dominates the measured signal,
 405 and the real part cannot be measured accurately. Well below the eutectic temperature (216 K for

406 $\text{Mg}(\text{ClO}_4)_2$, and 222 K for CaCl_2) all saline solutions exhibit apparent permittivity values around
 407 4, with the exception of the CaCl_2 at 33% (slightly hypereutectic) which is slightly higher (~ 5),
 408 probably due to the contribution of the salt grain inclusions in the ice [e.g., Pettinelli et al. (2016)]
 409 (Fig. 6A). These values indicate that, once a saline ice is completely frozen, the values of both real
 410 and imaginary parts are very low, and thus do not produce a strong dielectric contrast with the
 411 SPLD ice, irrespective of the concentration of salt. When the ice approaches the eutectic
 412 temperature, it starts to melt, generating an abrupt increase in both real and imaginary parts and in
 413 the apparent permittivity. At the eutectic temperature, for salt content around the eutectic
 414 concentration, the ice is largely or totally molten, and the apparent permittivity is higher than 10^2 ,
 415 well above the MARSIS threshold value (Fig. 6A). The volume fractions of the brines in each
 416 sample can be estimated from the eutectic temperature which is very close to the temperature where
 417 the curves intersect the threshold; we found 74% of brine content for CaCl_2 at 33%wt, 100% for
 418 $\text{Mg}(\text{ClO}_4)_2$ at 44%wt (eutectic concentration), and 44% for CaCl_2 at 21%wt. The dielectric response
 419 of the low concentration solutions is clearly different (Fig. 6B). Although an abrupt increase in
 420 apparent permittivity occurs around the eutectic temperature, its magnitude is much smaller:
 421 MARSIS threshold is reached by the pure CaCl_2 solution at ~ 240 K (Fig. 6B), and at higher
 422 temperatures by the other samples. The brine volume fractions at such temperatures are low (1.4 -
 423 6.0%), but the high value of the apparent permittivity is justified as briny liquid vein networks form,
 424 which drastically increase the conductivity once the temperature of the sample is above that of the
 425 eutectic. Because salt is nearly insoluble in ice (Gross et al., 1977; Stillman et al., 2013), the salts
 426 and their resulting brines tend to concentrate along grain boundaries (Grimm et al., 2008).
 427

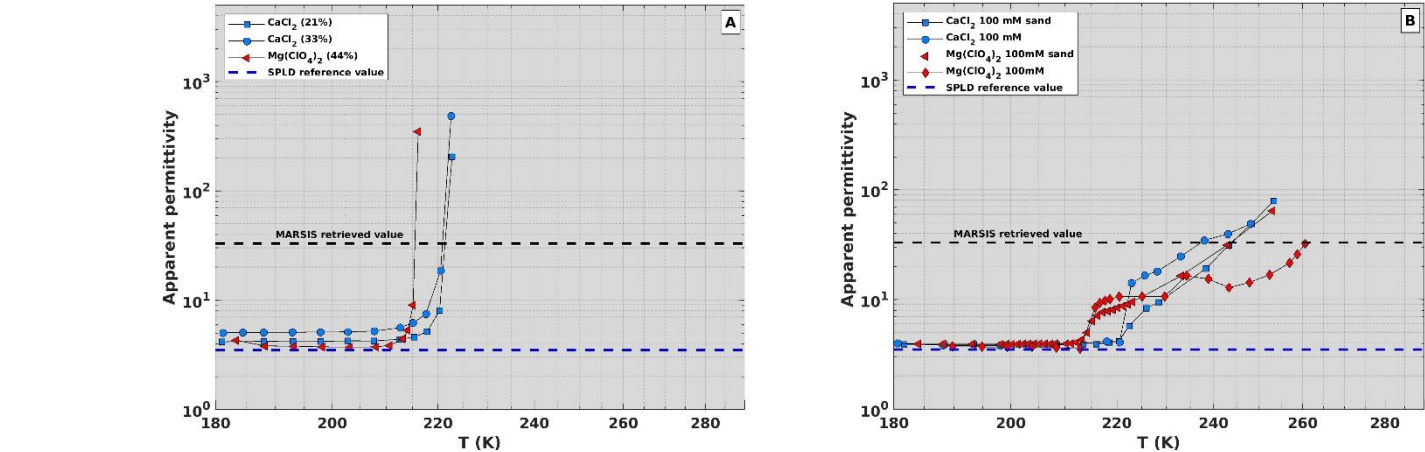

429 **Fig.6** Apparent permittivity of brines at 4 MHz as a function of temperature. A) Apparent permittivity of brine/ice
 430 samples starting from 21% and 33%wt CaCl_2 and 44%wt $\text{Mg}(\text{ClO}_4)_2$ solutions. B) Apparent permittivity of CaCl_2 and
 431 $\text{Mg}(\text{ClO}_4)_2$ salty ice/sand mixtures with 100 mM salt solutions. Two brine/ice samples with CaCl_2 and $\text{Mg}(\text{ClO}_4)_2$ and
 432 two CaCl_2 and $\text{Mg}(\text{ClO}_4)_2$ ice/sand mixtures with 46% (CaCl_2) and 57.1% ($\text{Mg}(\text{ClO}_4)_2$) volumetric fraction of admixed
 433 sand were measured. Black dashed line indicates the threshold $\epsilon_a = 33$ retrieved by MARSIS, and blue dashed line the
 434 SPLD ice permittivity value ($\epsilon_1' = 3.5$) used to compute the apparent permittivity.

435
 436 Finally, we used measured data and three-phases CRIM to evaluate the effect of eutectic or slightly
 437 hypereutectic brine volume fractions on the overall apparent permittivity of a sandy soil (regolith)
 438 (Fig. 7). For the complex permittivity of basaltic grains we used values from Mattei et al. (2014)
 439 and for the brines those retrieved from $\text{Mg}(\text{ClO}_4)_2$ (44%wt) and CaCl_2 (33%wt) samples at the
 440 eutectic temperature (Fig. 6A). The simulations compute the apparent permittivity of a soil with
 441 pores progressively saturated with brines. Even though the CaCl_2 (33% wt) is not an exact eutectic
 442 concentration, it is however close enough to produce reliable values. The results of the simulations
 443 do not appreciably differ, with the MARSIS threshold value reached by sand/ CaCl_2 brine mixtures
 444 at about 21% of brines volume fraction, and by sand/ $\text{Mg}(\text{ClO}_4)_2$ brine mixture at about 25% (Fig.
 445 7). Note that for brines volume fraction higher than 15% the apparent permittivity is above 16 (pink
 446 area in Fig.7). For a fully saturated soil (40% porosity) the apparent permittivity of the sand/ CaCl_2
 447 brine mixtures is ~94 and for the sand/ $\text{Mg}(\text{ClO}_4)_2$ brine mixture it is close to 71.

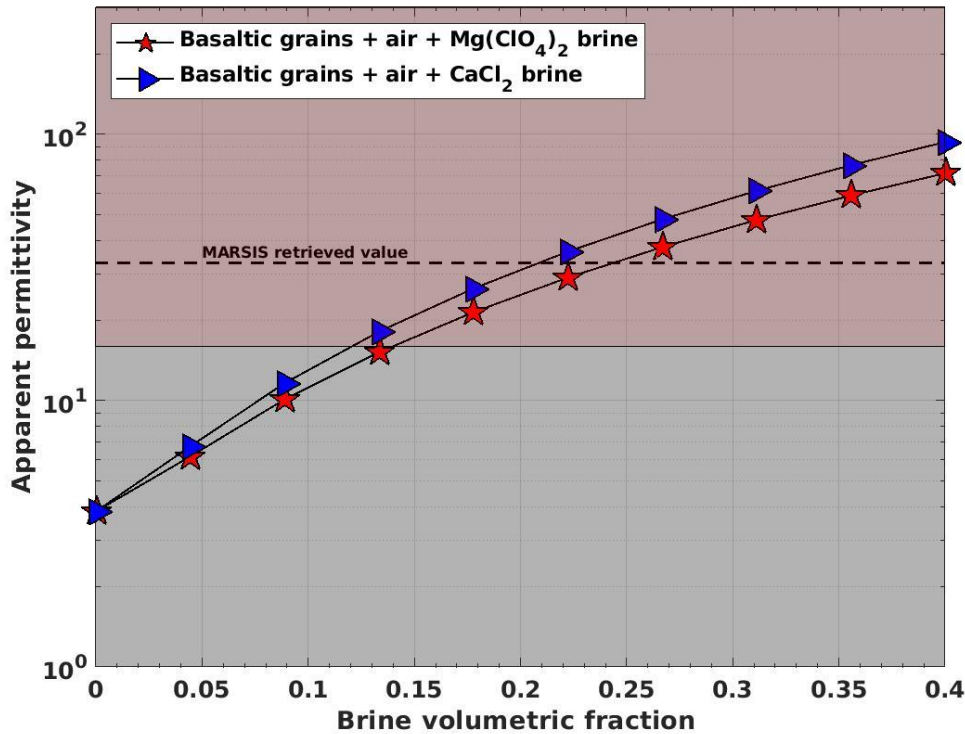


Fig.7 Effect of brines contents on the apparent permittivity of a soil from CRIM simulations at 4MHz. Apparent permittivity computed for a sandy soil with 40% porosity, from dry to brines saturated conditions. Blue triangles (33%wt CaCl₂) refer to the apparent permittivity measured at ~222K and red stars (44%wt Mg(ClO₄)₂) to the apparent permittivity measured at ~216K. Black dashed line indicates the threshold $\epsilon_a = 33$ retrieved by MARSIS; pink area highlights the apparent permittivity interval for which the probability that the permittivity assumes values $\epsilon_a \geq 16$ is 75%.

7. Discussion and Conclusion

Data collected by MARSIS and SHARAD in the areas where hydrated minerals have been found and/or where they are particularly abundant (Fig.1), do not show any indication of bright reflections coming from the surface. Given the cold temperatures and low water content estimated on Mars (2.3–3.1 wt.% H₂O) (Thomas et al., 2020), clay minerals have been considered a concern for radar attenuation but not a strong surface reflector, capable of preventing radar signals penetrating through the surface (Stillman and Grimm, 2011a; Cunje et al., 2018). These observations are in good agreement with literature data (Ca-bentonite sample in Fig. 3) and with our experimental results (Fig. S2), which show that hydrated salts and dry or low water content clay, do not generate strong radar reflections on the Martian surface or at the base of the SPLD (Table 1). Consequently, even if present in large amount in the basal sediments, hydrated salts and dry clay would exhibit apparent permittivity similar or of even lower than the SPLD ice (see Fig.S2).

466 Temperature has a dominating effect on the dielectric properties of clay and clay sediments (Lorek
467 and Wagner, 2013; Moore and Maeno, 1993; Bittelli et al., 2004). High values (25.1), such as those
468 shown at 230 K by almost pure nontronite (21% water content), are reduced by half (12.6) when
469 the temperature drops to 203 K. At this temperature, a clay sediment containing 60% of nontronite
470 does not exceed an apparent permittivity value of 9 (Fig. 4D). The drastic effect of temperature on
471 the dielectric behavior of clays is confirmed by our set of measurements conducted on clay
472 sediments at different water content, clay content, and different mineralogy: the MARSIS threshold
473 value is only obtained at high temperature ($\geq 250\text{K}$). At 203 K the apparent permittivity of the clay
474 sediments does not exceed 7, a value not dissimilar from the apparent permittivity values reported
475 for the hydrated salts or dry clay (Table 1). Comparing published data, simulations, and laboratory
476 measurements, we found that at 4 MHz and 230 K, the apparent permittivity of clay sediments,
477 even with a very high percentage of clay (70% volume fraction of nontronite) barely exceeds 16,
478 while at 203 K it does not go beyond 10. It follows that very low temperatures, such as those
479 commonly inferred at the base of the SPLD ($\leq 200\text{K}$), are totally inconsistent with the hypothesis
480 that clay sediments can generate a dielectric contrast with the SPLD large enough to obtain bright
481 basal echoes.

482 Our dielectric measurements on $\text{Mg}(\text{ClO}_4)_2$ and CaCl_2 brines at Martian subglacial conditions rule
483 out also salty ice as the cause for MARSIS bright reflections. Totally frozen brines having high
484 concentration of salts exhibit very low apparent permittivity, because salt grain inclusions do not
485 appreciably change the dielectric properties of the ice at MARSIS frequencies (Fig. 6A). These
486 results are supported by published data on the dielectric properties of sea ice at very low temperature
487 [e.g., Addison (1975), Fujino (1967)]. The apparent permittivity at low salt concentration (100 mM)
488 does not exceed 10-15 at the eutectic temperature. However, our results (Fig. 6B) suggest that a
489 few 100s mM of salt would probably be enough to reach the MARSIS threshold value (Stillman et
490 al., 2021). Vice versa, given the very large apparent permittivity values measured for both
491 $\text{Mg}(\text{ClO}_4)_2$ and CaCl_2 brines at high salt concentrations (Fig. 6A), a few 10s percent of liquid brine
492 volume fraction in the ice or in the soil would probably be sufficient to enhance the overall apparent
493 permittivity well above the MARSIS retrieved value (Fig. 6A and Fig. 7). Thus, based on their
494 dielectric behavior alone, $\text{Mg}(\text{ClO}_4)_2$ and CaCl_2 brines appear to be the preferable candidates to
495 explain MARSIS bright basal reflections observed in Ultimi Scopuli (Orosei et al., 2018; Lauro et
496 al., 2021). It has been argued that the eutectic temperatures of brines are too high to explain the
497 presence of liquid water at the base of the SPLD (Sori and Bramson, 2019). Previous studies have
498 found that salts with large freezing point depressions also have large metastable eutectic
499 temperatures that can be 10s of degrees lower than their eutectic temperature (Toner and Catling,

2018; Primm et al., 2020). Our measurements were performed after freezing the salt solutions to much colder temperature (<188 K) than the eutectic temperatures. For example, the 100 mM $\text{Mg}(\text{ClO}_4)_2$ sample was held at 193 K for 72 hours and never fully froze, until the temperature was reduced to 188 K. We can expect that other perchlorates like $\text{Ca}(\text{ClO}_4)_2$ (eutectic temperature ~198 K) would exhibit a dielectric response similar to the salts investigated in this work, but at lower temperature. Additionally, it has been proven that a mixture of Ca and Mg perchlorate has eutectic temperature well below those of the single salts (Nair and Unnikrishnan, 2020) and the brines can remain in a supercooled state at temperatures as low as 150 K (Toner et al., 2014). Whether supercooled salty waters can persist in subglacial environments over geologic timescales is still an open issue. Future work will need to focus on the specific question of the longevity of brines in hyperarid cold conditions. Metastability aside, however, another poorly constrained parameter is the thermal conductivity of the SPLD deposits, which directly bears on estimated values of basal temperatures: Sori and Bramson (2019) argue that under the current (and most likely) value of heat flux at the south polar region of Mars, the temperature at the base of the SPLD in Ultimi Scopuli is < 180 K. However, their model involves a highly conductive SPLD, which is far from being conclusively demonstrated. In fact, small variations in estimated values of conductivity of the SPLD materials, could dramatically increase basal temperatures to values equal to or even above those of perchlorate brine eutectics.

Appendix A

The absolute value of the reflection coefficient Γ_{12} can be rewritten as:

$$|\Gamma_{12}| = \left| \frac{\sqrt{\epsilon_2} - \sqrt{\epsilon_1}}{\sqrt{\epsilon_2} + \sqrt{\epsilon_1}} \right| \quad (6)$$

The complex permittivity of the second medium can be expressed in terms of its module and phase as:

$$\epsilon_2 = \epsilon_2' + i\epsilon_2'' = |\epsilon_2| e^{i\theta} = |\epsilon_2| (\cos \theta + i \sin \theta) \quad (7)$$

With

$$\cos \theta = \frac{\varepsilon_2'}{|\varepsilon_2|}$$

$$\sin \theta = \frac{\varepsilon_2''}{|\varepsilon_2|}$$

As a consequence, using the bisection rules, the square root of ε_2 is given by:

$$\sqrt{\varepsilon_2} = \sqrt{|\varepsilon_2|} e^{i\frac{\theta}{2}} = \sqrt{|\varepsilon_2|} \left(\cos \frac{\theta}{2} + i \sin \frac{\theta}{2} \right) = \sqrt{|\varepsilon_2|} \left(\sqrt{\frac{1+\cos \theta}{2}} + i \sqrt{\frac{1-\cos \theta}{2}} \right)$$

Replacing the last equation in Equation 6 we have:

$$|\Gamma_{12}| = \frac{\left| \sqrt{|\varepsilon_2|} \sqrt{1+\cos \theta} - \sqrt{2\varepsilon_1} + i \sqrt{|\varepsilon_2|} \sqrt{1-\cos \theta} \right|}{\left| \sqrt{|\varepsilon_2|} \sqrt{1+\cos \theta} + \sqrt{2\varepsilon_1} + i \sqrt{|\varepsilon_2|} \sqrt{1-\cos \theta} \right|} \quad (8)$$

The absolute value of Γ_{12} is given by,

$$\begin{aligned} |\Gamma_{12}| &= \frac{\sqrt{\left(\sqrt{|\varepsilon_2|} \sqrt{1+\cos \theta} - \sqrt{2\varepsilon_1} \right)^2 + \left(\sqrt{|\varepsilon_2|} \sqrt{1-\cos \theta} \right)^2}}{\sqrt{\left(\sqrt{|\varepsilon_2|} \sqrt{1+\cos \theta} + \sqrt{2\varepsilon_1} \right)^2 + \left(\sqrt{|\varepsilon_2|} \sqrt{1-\cos \theta} \right)^2}} = \\ &= \frac{\sqrt{|\varepsilon_2| (1+\cos \theta) - 2\sqrt{2\varepsilon_1} |\varepsilon_2| \sqrt{1+\cos \theta} + 2\varepsilon_1 + |\varepsilon_2| (1-\cos \theta)}}{\sqrt{|\varepsilon_2| (1+\cos \theta) + 2\sqrt{2\varepsilon_1} |\varepsilon_2| \sqrt{1+\cos \theta} + 2\varepsilon_1 + |\varepsilon_2| (1-\cos \theta)}} = \quad (9) \\ &= \frac{\sqrt{|\varepsilon_2| - \sqrt{2\varepsilon_1} |\varepsilon_2| \sqrt{1+\cos \theta} + \varepsilon_1}}{\sqrt{|\varepsilon_2| + \sqrt{2\varepsilon_1} |\varepsilon_2| \sqrt{1+\cos \theta} + \varepsilon_1}} = \frac{\sqrt{|\varepsilon_2|^2 + \varepsilon_1^2 - 2\varepsilon_1 |\varepsilon_2| \cos \theta}}{|\varepsilon_2| + \varepsilon_1 + \sqrt{2\varepsilon_1} |\varepsilon_2| \sqrt{1+\cos \theta}} \end{aligned}$$

Now, we want to estimate ε_a that is the quantity for which we can write the reflection coefficient

like a real quantity, i.e.:

$$|\Gamma_{12}| = \frac{\sqrt{\varepsilon_a} - \sqrt{\varepsilon_1}}{\sqrt{\varepsilon_a} + \sqrt{\varepsilon_1}} \quad (10)$$

From equation (10) it follows:

$$\varepsilon_a = \varepsilon_1 = \left(\frac{1+|\Gamma_{12}|}{1-|\Gamma_{12}|} \right)^2 = \varepsilon_1 \frac{1+|\Gamma_{12}|^2 + 2|\Gamma_{12}|}{1+|\Gamma_{12}|^2 - 2|\Gamma_{12}|} \quad (11)$$

From equation (9) we can calculate $|\Gamma_{12}|^2$:

$$|\Gamma_{12}|^2 = \frac{\varepsilon_1 + |\varepsilon_2| - \sqrt{2\varepsilon_1|\varepsilon_2|}\sqrt{1+\cos\theta}}{\varepsilon_1 + |\varepsilon_2| + \sqrt{2\varepsilon_1|\varepsilon_2|}\sqrt{1+\cos\theta}} \quad (12)$$

It follows that

$$1 + |\Gamma_{12}|^2 \pm 2|\Gamma_{12}| = 2 \frac{\varepsilon_1 + |\varepsilon_2| \pm \sqrt{|\varepsilon_2|^2 + \varepsilon_1^2 - 2\varepsilon_1|\varepsilon_2|\cos\theta}}{\varepsilon_1 + |\varepsilon_2| + \sqrt{2\varepsilon_1|\varepsilon_2|}\sqrt{1+\cos\theta}} \quad (13)$$

Replacing equation (13) in equation (10), we obtain:

$$\begin{aligned} \varepsilon_a &= \varepsilon_1 \frac{\frac{\varepsilon_1 + |\varepsilon_2| + \sqrt{|\varepsilon_2|^2 + \varepsilon_1^2 - 2\varepsilon_1|\varepsilon_2|\cos\theta}}{\varepsilon_1 + |\varepsilon_2| + \sqrt{2\varepsilon_1|\varepsilon_2|}\sqrt{1+\cos\theta}}}{\frac{\varepsilon_1 + |\varepsilon_2| - \sqrt{|\varepsilon_2|^2 + \varepsilon_1^2 - 2\varepsilon_1|\varepsilon_2|\cos\theta}}{\varepsilon_1 + |\varepsilon_2| + \sqrt{2\varepsilon_1|\varepsilon_2|}\sqrt{1+\cos\theta}}} = \\ &= \varepsilon_1 \frac{\varepsilon_1 + |\varepsilon_2| + \sqrt{|\varepsilon_2|^2 + \varepsilon_1^2 - 2\varepsilon_1|\varepsilon_2|\cos\theta}}{\varepsilon_1 + |\varepsilon_2| - \sqrt{|\varepsilon_2|^2 + \varepsilon_1^2 - 2\varepsilon_1|\varepsilon_2|\cos\theta}} = \\ &= \varepsilon_1 \frac{\varepsilon_1 + |\varepsilon_2| + \sqrt{\varepsilon_1^2 + |\varepsilon_2|^2 - 2\varepsilon_1\varepsilon_2'}}{\varepsilon_1 + |\varepsilon_2| - \sqrt{\varepsilon_1^2 + |\varepsilon_2|^2 - 2\varepsilon_1\varepsilon_2'}} \end{aligned}$$

That is the expression of the apparent permittivity given in equation (5).

Appendix B

X-ray Diffraction analysis (XRD)

Mineralogical analysis was performed using the Rigaku MiniFlex II X-ray diffractometer with Cu-Ka radiation, monochromated with graphite and operated at 30 kV and 15 mA. The diffraction pattern was acquired on bulk powder samples obtained by grinding small pieces of rock with mechanical agata mortar and pestle. The XRD patterns were collected in the 3–50 2θ range which is representative of the main mineral species diffraction peaks. The different mineralogical species were identified by matching the peaks with the reference Crystallography Open Database (COD 2020) using the Match! software (version 3.10.2). Semi-quantitative analysis was performed using a Reference Intensity Ratio method (RIR-method) included in the Match! software (version 3.10.2). This analysis is based on I/I_c factor indicating the ratio between the intensity of the highest peak diffraction of the identified phase in comparison with the highest peak of Corundum standard.

Appendix C

Dielectric measurements

The experimental set-up consists of a two-port Vector Network Analyzer (Agilent E5071C) connected through two cables to a coaxial-cage line (cell) filled with the material under test. The measuring cell is a stainless-steel cage housed in a plexiglass box; it consists of a central conductor and an outer structure made by eight equally spaced rods arranged in a cylindrical pattern. Detailed description of the setup can be found elsewhere (Mattei et al., 2013). The experimental setup allows to retrieve the dielectric properties of the material under test (in terms of complex dielectric permittivity and complex magnetic permeability), applying the Nicolson-Ross-Weir algorithm (Nicolson and Ross, 1970; Weir, 1974). The fundamental equations are given by:

$$\sqrt{\frac{\varepsilon}{\mu}} F_g = \frac{1-\Gamma}{1+\Gamma} \quad (14)$$

$$\sqrt{\varepsilon\mu} l = \frac{jc}{2\pi f} \ln(\Psi) \quad (15)$$

where Γ and Ψ are the reflection and transmission coefficients through the coaxial line, ε and μ are the complex relative dielectric permittivity and magnetic permeability, respectively, F_g is a geometrical factor that accounts for the impedance mismatch between the coaxial cables and the coaxial-cage line in air, l is the length of the coaxial-cage line and c is the velocity of the light in a vacuum. Combining Equation (14) and (15), the complex dielectric permittivity can be retrieved as follows:

$$\varepsilon = \frac{jc}{2\pi f} \frac{1}{F_g l} \frac{1-\Gamma}{1+\Gamma} \ln(\Psi) \quad (16)$$

The coaxial-cage line is inserted in a cryostat and cooled using dry ice pellets. The measurements were performed first progressively decreasing the temperature from 298 K to 200 K and then allowing the system to slowly reach room temperature. Each cycle lasted about 50 h, 10 h for cooling and 40 h for heating the sample. A Pt-100 probe was inserted in the coaxial-cage line to measure sample temperature during the entire cycle.

Appendix D

Supplementary material

References

- Addison J. R., Electrical properties of saline ice at 1 kHz down to -150°C . *J. App. Phys.*, **46**(2), 513-522 (1975).
- Bibring J.P., Y. Langevin, J.F. Mustard, F. Poulet, R. Arvidson, A. Gendrin, B. Gondet, N. Mangold, P. Pinet, P. Forget, Global mineralogical and aqueous Mars history derived from OMEGA/Mars Express data. *Science* **312**, 400–404 (2006).
- Bierson C. J., S. Tulaczyk, S. W. Courville, N. E. Putzig, Strong MARSIS Radar Reflections from the Base of Martian South Polar Cap may be due to Conductive Ice or Minerals. *Geophysical Research Letters*, e2021GL093880 (2021).
- Bishop J.L., A.G. Fairèn, J.R. Michalski, L. Gago-Duport, L.L. Baker, M. A. Velbel, C., Gross, E.B. Rampe, Surface clay formation during short-term-warmer and wetter conditions on largely cold ancient Mars. *Nature Astronomy* **2**, 206-2013 (2018).
- Bittelli M., M. Flury, K. Roth Use of dielectric spectroscopy to estimate ice content in frozen porous media. *Water resources research*, **40**(4) (2004).
- Bristow T.F., E.B. Rampe, C.N. Achilles, D.F. Blake, S.J. Chipera, P. Craig, J.A. Crisp, D.J. Des Marais, R.T. Downs, R. Gellert, J.P. Grotzinger, S. Gupta, R.M. Hazen, B. Horgan, J.V. Hogancamp, P.R. Mahaffy, A.C. McAdam, D.W. Ming, J.M. Morookian, R.V. Morris, S.M. Morris, A. H. Treiman, D.T. Vaniman, A.R. Vasavada, A.S. Yen, Clay Mineral Diversity and Abundance in Sedimentary Rocks of Gale Crater, Mars. *Sci. Adv.* **4**, eaar3330 (2018).
- Burton E. F., L. G. Turnbull, Dielectric constants of solids at high frequencies and the influence of water of crystallization on dielectric constant. Proceedings of the Royal Society of London. Series A-Mathematical and Physical Sciences, 158(893), 182-198 (1937).
- Cadène A., B. Rotenberg, S. Durand-Vidal, J. C. Badot, P. Turq, Dielectric spectroscopy as a probe for dynamic properties of compacted smectites. *Physics and Chemistry of the Earth, Parts A/B/C*, **31**(10-14), 505-510 (2006).
- Chelidze T. L., Y. Gueguen, C. Ruffet, Electrical spectroscopy of porous rocks: a review—II. Experimental results and interpretation. *Geophysical Journal International*, **137**(1), 16-34 (1999).
- Cheng C. K., The dielectric constants of some metallic sulphates containing various amounts of water of crystallization. *The London, Edinburgh, and Dublin Philosophical Magazine and Journal of Science*, **30**(203), 505-515 (1940).

Chevrier V. F., J. Hanley, T. S. Altheide, Stability of perchlorate hydrates and their liquid solutions at the Phoenix landing site, Mars. *Geophys. Res. Lett.*, **36**(10) (2009).

Clark B.C., R.E. Arvidson, R. Gellert, R.V. Morris, D.W. Ming, L. Richter, S.W. Ruff, J.R. Michalski, W.H. Ferrand, A. Yen, K.E. Herkenhoff, R. Li, S.W. Squyres, C. Schröder, G. Klingelhöfer, J.F. Bell III, Evidence for montmorillonite or its compositional equivalent in Columbia Hills, Mars. *J. Geophys. Res.* **112**, E06S01 (2007).

Cunje A. B., R. R. Ghent, A. Boivin, C. A. Tsai, D. Hickson, Dielectric properties of Martian regolith analogs and smectite clays. In Lunar and Planetary Science Conference (No. **2083**, p. 1805) (2018).

Ehlmann B. L., J. F. Mustard, S. L. Murchie, J.P. Bibring, A. Meunier, A. Fraeman, Y. Langevin, Subsurface water and clay mineral formation during the early history of Mars, *Nature* **479**, 53–60 (2011).

Ehlmann B. L., J.F. Mustard, G.A. Swayze, R.N. Clark, J.L. Bishop, F. Poulet, D.J. Des Marais, L. H. Roach, R. E. Milliken, J.J. Wray, O. Barnouin-Jha, S.L. Murchie, Identification of hydrated silicate minerals on Mars using MRO-CRISM: Geologic context near Nili Fossae and implications for aqueous alteration. *Journal of Geophysical Research* **114**, E00D08, (2009).

Ehlmann B.L., C.S. Edwards, Mineralogy of the Martian surface. *Annu Rev Earth Planet Sci* **42**, 291-315 (2014).

Ehlmann B.L., G. Berger, N. Mangold, J.R. Michalski, D.C. Catling, S.V. Ruff, E. Chassefière, P.B. Niles, V. Chevrier, F. Poulet, Geochemical consequences of widespread clay mineral formation in Mars' Ancient Crust. *Space Science Review* **174**, 329–364 (2013).

Fujino K., Electrical properties of sea ice. *Phys. of Snow and Ice: proc.* **1**(1), 633-648 (1967).

Gaudin A., E. Dehouck, O. Grauby, N. Mangold, Formation of clay minerals on Mars: Insights from long-term experimental weathering of olivine. *Icarus*, **311**, 210-223 (2018).

Gooding J.L., D.W. Muenow, Martian volatiles in shergottite EETA 79001: New evidence from oxidized sulfur and sulfur-rich aluminosilicates. *GCA* **50**(6), 1049-1059 (1986).

Grima C., J. S. Greenbaum, E. J. Lopez Garcia, K. M. Soderlund, A. Rosales, D. D. Blankenship, D. A. Young, Radar detection of the brine extent at McMurdo Ice Shelf, Antarctica, and its control by snow accumulation. *Geophysical Research Letters*, **43**(13), 7011-7018 (2016).

Grimm R. E., D. E. Stillman, S. F. Dec, M. A. Bullock, Low-frequency electrical properties of polycrystalline saline ice and salt hydrates. *J. Phys. Chem. B* **112**(48), 15382-15390 (2008).

Gross G.W., P.M. Wong, K. Humes, Concentration dependent solute redistribution at the ice-water phase boundary. III. Spontaneous convection. Chloride solutions. *J. Chem. Phys.* **67**(11), 5264–5274 (1977).

Ishida T., Dielectric Behavior of Clay Surfaces. *Encyclopedia of Surface and Colloid, Science*, 1385-1392 (2002).

Johnston C. T., Probing the nanoscale architecture of clay minerals. *Clay Minerals*, **45**(3), 245-279 (2010).

Kaatze U., Complex permittivity of water as a function of frequency and temperature. *J. Chem. Engin. Data* **34**(4), 371-374 (1989).

Kaden H., F. Königer, M. Strømme, G. A. Niklasson, K. Emmerich, Low-frequency dielectric properties of three bentonites at different adsorbed water states. *Journal of colloid and interface science*, **411**, 16-26 (2013).

Kamiyoshi K. I., T. Miyamoto, Dielectric properties of the water of crystallization. In *Science Reports of the Research Institutes, Tohoku University. Ser. A, Physics, Chemistry and Metallurgy*, Vol. 2, pp. 370-379, (1950).

Kao K. C., Dielectric phenomena in solids. Elsevier (2004).

Kaviratna P. D., T. J. Pinnavaia, P. A. Schroeder, Dielectric properties of smectite clays. *Journal of Physics and Chemistry of Solids*, **57**(12), 1897-1906 (1996).

Kounaves S.P., B.L. Carrier, G.D. O'Neil, S.T. Stroble, M.W. Claire Evidence of martian perchlorate, chlorate, and nitrate in Mars meteorite EETA79001: Implications for oxidants and organics. *Icarus* **229**, 206-213 (2014).

Kuławcz K., J. Waliszewski, S. Bai, L. Ren, H. Niu, K. Orzechowski, Changes in structural and dielectric properties of nontronite caused by heating. *Applied Clay Science*, **202**, 105952 (2021).

Kuławcz K., K. Orzechowski, Nontronite and intercalated nontronite as effective and cheap absorbers of electromagnetic radiation. *Dalton Transactions*, **48**(12), 3874-3882 (2019).

Kuligiewicz A., A. Derkowski, Tightly bound water in smectites. *American Mineralogist*, **102**(5), 1073-1090 (2017).

Lauro S. E., E. Pettinelli, G. Caprarelli, L. Guallini, A. P. Rossi, E. Mattei, R. Orosei, Multiple subglacial water bodies below the south pole of Mars unveiled by new MARSIS data. *Nat. Astron.*, **5**(1), 63-70 (2021).

Leshin L.A., E. Vicenzi, Aqueous processes recorded by Martian meteorites: Analyzing Martian water on Earth. *Elements* **2**(3), 157-162 (2006).

Liu N., J. K. Mitchell, Modelling electromagnetic properties of saturated sand and clay. *Geomechanics and Geoengineering: An International Journal*, **4**(4), 253-269 (2009).

Lorek A., N. Wagner, Supercooled interfacial water in fine-grained soils probed by dielectric spectroscopy. *The Cryosphere*, **7**(6), 1839-1855 (2013).

Mattei E., S. E. Lauro, E. Pettinelli, G. Vannaroni, Coaxial-Cage Transmission Line for Electromagnetic Parameters Estimation. *IEEE Trans. Instr. Meas.* **62**, (2013).

Mattei E., S. E. Lauro, G. Vannaroni, B. Cosciotti, F. Bella, E. Pettinelli, Dielectric measurements and radar attenuation estimation of ice/basalt sand mixtures as martian Polar Caps analogues. *Icarus* **229**, 428-433 (2014).

McSween H.Y., What we have learned about Mars from SNC meteorites. *Meteoritics* **29**, 757-779 (1994).

Moore J. C., N. Maeno, Dielectric properties of frozen clay and silt soils. *Cold regions science and technology*, **21**(3), 265-273 (1993).

Murchie S.L., J.F. Mustard, B.L. Ehlmann, R.E. Milliken, J.L. Bishop, N.K. McKeown, D.J. Noe Dobrea EZ, F.P. Seelos, D.L. Buczkowski, S.M. Wiseman, R.E. Arvidson, J.J. Wray, G. Swayze, R.N. Clark, Des Marais, A.S. McEwen, J.P. Bibring, A synthesis of Martian aqueous mineralogy after 1 Mars year of observations from the Mars Reconnaissance Orbiter. *J Geophys Res Planets* **114**, E00D06 (2009).

Murchie S.L., R. Arvidson, P. Bedini, K. Beisser, J.P. Bibring, J. Bishop, J. Boldt, P. Cavender, , T. Choo, R.T. Clancy, E.H. Darlington, D. Des Marais, R. Espiritu, D. Fort, R. Green, E. Guinness, J. Hayes, C. Hash, K. Heffernan, J. Hemmler, G. Heyler, D. Humm, J. Hutchison, N. Izenberg, R. Lee, J. Lees, D. Lohr, E. Malaret, T. Martin, J.A. McGovern, P. McGuire, R. Morris, J. Mustard, S. Pelkey, E. Rhodes, V. Robinson, T. Roush, E. Schaefer, G. Seagrave, F. Seelos, P. Silvergate, S. Slavney, M. Smith, W. J. Shyong, K. Strohbehn, H. Taylor, P. Thompson, B. Tossman, M. Wirzburger, M. Wolff, Compact Reconnaissance Imaging Spectrometer for Mars (CRISM) on Mars Reconnaissance Orbiter (MRO). *J. Geophys. Res.* **112**, E05S03 (2007).

Mustard J.F., C.D. Cooper, M.K. Rifkin, Evidence for recent climate change on Mars from the identification of youthful near-surface ground ice. *Nature* **412**, 411-414 (2001).

Muttik N., F.M. McCubbin, L.P. Keller, A.R. Santos, W.A. McCutcheon, P.P. Provencio, Z. Rahman, C.K. Shearer, J.W. Boyce, C.B. Agee Inventory of H₂O in the ancient Martian regolith from Northwestern Africa 7034: The important role of Fe oxides. *Geophys Res Lett.* **41**(23), 8235-8244 (2014).

Nair C. R., V. Unnikrishnan, Stability of the Liquid Water Phase on Mars: A Thermodynamic Analysis Considering Martian Atmospheric Conditions and Perchlorate Brine Solutions. *ACS omega* **5**(16), 9391-9397 (2020).

Nicolson A. M., G. F. Ross, Measurement of the intrinsic properties of materials by time-domain techniques. *IEEE Trans. Instr. Meas.* **19**(4), 377-382 (1970).

Nobes D. C., E. F. Davis, S. A. Arcone, “Mirror-image” multiples in ground-penetrating radar. *Geophysics*, **70**(1), K20-K22 (2005).

Olhoeft G. R., Electrical properties of natural clay permafrost. *Canadian Journal of Earth Sciences*, **14**(1), 16-24 (1977).

Olhoeft G. R., Electrical properties of rocks. *Physical properties of rocks and minerals*, **2**, 257-297 (1981).

Olhoeft G. R., Tables of room temperature electrical properties for selected rocks and minerals with dielectric permittivity statistics. US Department of the Interior, *Geological Survey* (1979).

Orosei R., S. E. Lauro, E. Pettinelli, A. Cicchetti, M. Coradini, B. Cosciotti, R. Seu, Radar evidence of subglacial liquid water on Mars. *Science*, **361**(6401), 490-493 (2018).

Parkhomenko E. I., *Electrical Properties of Rocks* (1967).

Pettinelli E., S. E. Lauro, B. Cosciotti, E. Mattei, F. Di Paolo, G. Vannaroni, Dielectric characterization of ice/MgSO₄·11H₂O mixtures as Jovian icy moon crust analogues. *Earth and Planetary Science Letters*, **439**, 11-17 (2016).

Plesa A.C., S. Padovan, N. Tosi, D. Breuer, M. Grott, M.A. Wieczorek, T. Spohn, S.E. Smrekar, W.B. Banerdt, The thermal state and interior structure of Mars. *Geophys. Res. Lett.* **45**, 12198-12209, (2018).

Poulet F., D. Mangold, D. Loizeau, J.P. Bibring, Y. Langevin, J. Michalski, B. Gondet, Abundance of minerals in the phyllosilicate-rich units on Mars. *Astron. Astrophys* **487**, L41–L44 (2008).

Primm K. M., D. E. Stillman, T. I. Michaels, Investigating the hysteretic behavior of Mars-relevant chlorides. *Icarus* **342**, 113342 (2020).

Rampe E. B., D. W. Ming, D. F. Blake, T. F. Bristow, S. J. Chipera, J. P. Grotzinger, R. V. Morris, S. M. Morrison, D. T. Vaniman, A. S. Yen, C. N. Achilles, P. I. Craig, D. J. Des Marais, R. T. Downs, J. D. Farmer, K. V. Fendrich, R. Gellert, R. M. Hazen, L. C. Kah, J. M. Morookian, T. S. Peretyazhko, P. Sarrazin, A. H. Treiman, J. A. Berger, J. Eigenbrode, A. G. Fairén, O. Forni, S. Gupta, J. A. Hurowitz, N. L. Lanza, M. E. Schmidt, K. Siebach. B. Sutter, L. M. Thompson, Mineralogy of an ancient lacustrine mudstone succession from the Murray formation, Gale crater, Mars. *Earth and Plan. Science Lett.* **471**, 172-185 (2017).

Rampe E. B., D.F. Blake, T.F. Bristow, D.W. Ming, D.T. Vaniman, R.V. Morris, C.N. Achilles, S.J. Chipera, S.M. Morrison, V.M. Tu, A.S. Yen, N. Castle, G.W. Downs, R.T. Downs, J.P. Grotzinger, R.M. Hazen, A.H. Treiman, T.S. Peretyazhko, D.J. Des Marais, R.C. Walroth, P.I. Craig, J.A. Crisp, B. Lafuente, J.M. Morookian, P.C. Sarrazin, M.T. Thorpe, J.C. Bridges, L.A. Edgar, C.M. Fedo, C. Freissinet, R. Gellert, P.R. Mahaffy, H.E. Newsom, J.R. Johnson, L.C.

Kah, K.L. Siebach, J. Schieber, V.Z. Sun, A.R. Vasavada, D. Wellington, R.C. Wiens, Mineralogy and geochemistry of sedimentary rocks and eolian sediments in Gale crater, Mars: A review after six Earth years of exploration with Curiosity. *Geochemistry* **80**, 125605 (2020a).

Rampe E. B., T. F. Bristow, R. V. Morris, S. M. Morrison, C. N. Achilles, D. W. Ming, D. T. Vaniman, D. F. Blake, V. M. Tu, S. J. Chipera, A. S. Yen, T. S. Peretyazhko, R. T. Downs, R. M. Hazen, A. H. Treiman, J. P. Grotzinger, N. Castle, P. I. Craig, D. J. Des Marais, M. T. Thorpe, R. C. Walroth, G. W. Downs, A. A. Fraeman, K. L. Siebach, R. Gellert, A. C. McAdam, P. -Y. Meslin, B. Sutter, M. R. Salvatore, Mineralogy of Vera Rubin Ridge from the Mars Science Laboratory CheMin Instrument. *J. Geophys. Res.* **125**, e2019JE006306. (2020b).

Rutishauser A., D. D. Blankenship, M. Sharp, M. L. Skidmore, J. S. Greenbaum, C. Grima, D. A. Young, Discovery of a hypersaline subglacial lake complex beneath Devon Ice Cap, Canadian Arctic. *Science advances*, **4**(4), eaar4353 (2018).

Saarenketo T., Electrical properties of water in clay and silty soils. *Journal of applied geophysics*, **40**(1-3), 73-88 (1998).

Saltas V., F. Vallianatos, D. Triantis, Dielectric properties of non-swelling bentonite: The effect of temperature and water saturation. *Journal of Non-Crystalline Solids*, **354**(52-54), 5533-5541(2008).

Siegert M. J., A 60-year international history of Antarctic subglacial lake exploration. *J. Geol. Soc. Lond. Mem.* **461**, 7–21 (2018).

Sihvola A. H., Electromagnetic mixing formulas and applications (No. 47). Iet. (1999).

Smith I. B., D. Lalich, C. Rezza, B. Horgan, J. L. Whitten, S. Nerozzi, J. W. Holt, A Solid Interpretation of Bright Radar Reflectors Under the Mars South Polar Ice. *Geophysical Research Letters*, e2021GL093618 (2021).

Sori M. M., A. M. Bramson, Water on Mars, with a grain of salt: local heat anomalies are required for basal melting of ice at the south pole today. *Geophy. Res. Lett.* **46**(3), 1222-1231 (2019).

Sposito G., R. Prost, Structure of water adsorbed on smectites. *Chemical Reviews*, **82**(6), 553-573 (1982).

Stewart R. D., R. R. Unterberger, Seeing through rock salt with radar. *Geophysics*, **41**(1), 123-132, (1976).

Stillman D. E., J. A. MacGregor, R. E. Grimm, Electrical response of ammonium-rich water ice. *Ann. Glaciol.* **54**(64), 21–26 (2013).

Stillman D. E., R. E. Grimm, Radar penetrates only the youngest geological units on Mars. *J. Geophys. Res. Plan.* **116**(E3) (2011a).

Stillman D. E., R. E. Grimm, S. F. Dec, Low-Frequency Electrical Properties of Ice– Silicate Mixtures. *J. Phys. Chem. B* **114**(18), 6065-6073 (2010).

Stillman D. E., R. E. Grimm. Dielectric signatures of adsorbed and salty liquid water at the Phoenix landing site, Mars. *J. Geophys. Res. Plan.* **116**(E9) (2011b)

Stillman D., G. Olhoeft, Frequency and temperature dependence in electromagnetic properties of Martian analog minerals. *Journal of Geophysical Research: Planets*, **113**(E9), (2008).

Stillman, D. E., Pettinelli, E., Primm, K. M., Caprarelli, G., Mattei, E., Lauro, S. E., & Cosciotti, B. Perchlorate and Chloride Brines as the Cause of the MARSIS Bright Basal Reflections: Laboratory Measurements. *LPI Contributions*, 2614, 6028, (2021).

Tangari A. C., L. Marinangeli, F. Scarciglia, L. Pompilio, E. Piluso, Volcanic holocrystalline bedrock and hydrothermal alteration: a terrestrial analogue for Mars. *Minerals*, **10**(12), 1082 (2020).

Thomas N. H., B. L. Ehlmann, W. Rapin, F. Rivera-Hernández, N. T. Stein, J. Frydenvang, R. C. Wiens, Hydrogen Variability in the Murray Formation, Gale Crater, Mars. *Journal of Geophysical Research: Planets*, **125**(9), e2019JE006289 (2020).

Toner J. D., D. C. Catling, Chlorate brines on Mars: implications for the occurrence of liquid water and deliquescence. *Earth Planet. Sci. Lett.* **497**, 161–168 (2018).

Toner J.D., D.C. Catling, B. Light, The formation of supercooled brines, viscous liquids, and low-temperature perchlorate glasses in aqueous solutions relevant to Mars. *Icarus* **233**, 36-47 (2014).

Treiman A. H., D. L. Bish, D. T. Vaniman, S. J. Chipera, D. F. Blake, D. W. Ming, R. V. Morris, T. F. Bristow, S. M. Morrison, M. B. Baker, E. B. Rampe, R. T. Downs, J. Filiberto, A. F. Glazner, R. Gellert, L. M. Thompson, M. E. Schmidt, L. Le Deit, R. C. Wiens, A. C. McAdam, C. N. Achilles, K. S. Edgett, J. D. Farmer, K. V. Fendrich, J. P. Grotzinger, S. Gupta, J. M. Morookian, M. E. Newcombe, M. S. Rice, J. G. Spray, E. M. Stolper, D. Y. Sumner, A. R. Vasavada, A. S. Yen, Mineralogy, provenance, and diagenesis of a potassic basaltic sandstone on Mars: CheMin X-ray diffraction of the Windjana sample (Kimberley area, Gale crater). *J. Geophys. Res. Planets* **121**, 75–106 (2016).

Treiman A.H., R.A. Barrett, J.L., Gooding, Preterrestrial aqueous alteration of the Lafayette (SNC) meteorite. *Meteoritics* **28**(1), 86-97(1993).

Tulaczyk S. M., N. T. Foley, The role of electrical conductivity in radar wave reflection from glacier beds. *The Cryosphere*, **14**(12), 4495-4506 (2020).

Weir W. B., Automatic measurement of complex dielectric constant and permeability at microwave frequencies. *Proc. IEEE* **62**-1, 33–36 (1974).

Wersin P., E. Curti, C. A. J. Appelo, Modelling bentonite–water interactions at high solid/liquid ratios: swelling and diffuse double layer effects. *Applied Clay Science*, **26**(1-4), 249-257 (2004).
Wieczorek M.A., Constraints on the composition of the martian south polar cap from gravity and topography. *Icarus* **196**, 506-517 (2008).
Young K. F., H. P. R. Frederikse, Compilation of the static dielectric constant of inorganic solids. *Journal of Physical and Chemical Reference Data*, **2**(2), 313-410 (1973).

Acknowledgments

The authors would like to thank Prof. Orzechowski for the use of his dataset on real and imaginary parts of natural nontronite, and Dr. Antonio Baliva and Dr. Luca Colantuono for collecting and preparing clay samples measured in this work. This work was supported by the Italian Space Agency (ASI) through contract ASI-INAF 2019–21-HH.0.